


BERICA CAVI

MINI RG 59 + ...

Cables for cameras, tinned copper braid shield, low halogens emission.

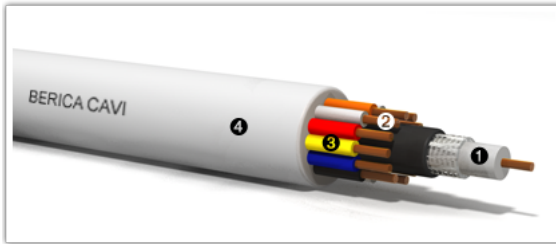

1. Mini RG 59
2. Conductor
3. Insulation
4. Sheath

APPLICATION: Suitable for connecting cameras.

INSTALLATION: For fixed indoor Installation, without protection or in pipes, conduits and similar closed systems.

FEATURES	DESCRIPTION	STANDARD
MINI RG 59 75?		
Conductor :	annealed red copper (9x0,10 mm)	
Insulation :	polyethylene foam	
Shield :	braid of annealed tinned copper	
Sheath :	PVC , quality TM2	CEI EN 50363
Sheath colour :	black RAL 9005	
COLOURED CORES		
Conductors :	annealed red copper	
Insulation :	PVC , TI2 quality	CEI EN 50363
Outer sheath :	PVC , TM2 quality	CEI EN 50363
Low halogens emission :	(< 22%)	CEI EN 50267-2-1 IEC 60754-1
Outer sheath colour :	white RAL 9010 or black Ral 9005	
Max working temperature :	70 °C	
Min. installation temperature :	0 °C	
Bending radius :	Ø x 14	

TYPE	MEDIUM Ø OUTER	MEDIUM WEIGHT	PRODUCT CODE
	mm	kg/km	
Mini RG 59 + 2x0,50 mm ²	6,4	44,0	B41TLC2050BIANCO
Mini RG 59 + 2x0,50 + 2x0,22 mm ²	6,4	47,0	B41TLC4050BIANCO
Mini RG 59 + 2x0,50 + 4x0,22 mm ²	6,7	48,0	B41TLC6050BIANCO
Mini RG 59 + 2x0,75 mm ²	6,6	45,0	B41TLC2075BIANCO
Mini RG 59 + 2x0,75 + 2x0,22 mm ²	6,6	48,0	B41TLC4075BIANCO
Mini RG 59 + 2x0,75 + 4x0,22 mm ²	6,9	53,0	B41TLC6075BIANCO
Mini RG 59 + 2x1 mm ²	7,2	53,0	B41TLC2100BIANCO
Mini RG 59 + 2x1 + 2x0,22 mm ²	7,2	56,0	B41TLC4100BIANCO
Mini RG 59 + 2x1 + 4x0,22 mm ²	7,5	60,0	B41TLC6100BIANCO
Mini RG 59 + 2x1,5	8,0	53,5	B41TLC2150BIANCO
Mini RG 59 + 2x1,5 +2x0,22 mm ²	8,0	57,0	B41TLC4150BIANCO
Mini RG 59 + 2x1,5 +4x0,22 mm ²	8,3	61,0	B41TLC6150BIANCO
Mini RG 59 + Mini COAX + 2x0,75 + 4x0,22 mm ²	8,6	76,0	B41TLCCOAX2742

Berica Cavi Spa reserves the right to edit all the information on the website without providing prior notice to customers and / or users